

SIP-T19P E2

132 x 64-pixel graphical LCD

Single VoIP account

Dual 10/100 Ethernet Ports, integrated PoE

Full-duplex speakerphone

Headset Port

Wall mountable

XML remote phonebook



Entry-level IP Phone with 1 Line

The T19P E2 is Yealink's entry-level IP phone that offers features and performance normally associated with much more advanced phones. The use of high quality materials, combined with a generously large 132 x 64 pixel graphical LCD that gives a clear 5-line display, guarantees both a smoother user experience and easy access to a wealth of visual information at a glance. Dual 10/100Mbps network ports with integrated PoE are ideal for extended network use.

The T19P E2 supports a single VoIP account, simple, flexible and secure installation options, plus IPv6 and SRTP/HTTPS/TLS, VLAN and QoS. It supports handsfree and headset use, is wall mountable and has been designed with productivity in mind.

SIP-T19P E2

Audio Features

Full-duplex hands-free speakerphone with AEC
 Codecs: G.711(A/μ), G.723, G.729AB, G.726
 DTMF: In-band, out-of-band(RFC 2833) and SIP INFO
 VAD, CNG, AEC, PLC, AJB, AGC

Phone Features

1 VoIP account
 Call hold, mute, DND,
 One-touch speed dial, hotline
 Redial, call return, auto answer
 Call forward, call waiting, call transfer
 Group listening, SMS
 Local 3-way conferencing
 Direct IP call without SIP proxy
 Ring tone selection/import/delete
 Keypad lock, emergency call
 Set date time manually or automatically
 URL & action URI
 > Dial Plan
 > XML Browser
 > Action URL & action URI

Directory

Local phonebook up to 1000 entries
 Black list
 XML remote phonebook
 Intelligent search method
 Phonebook search/import/export
 Call history: dialled/received/missed/forwarded

IP-PBX Features

Anonymous call, anonymous call rejection
 Message waiting indicator (MWI)
 Voice mail, call park, call pickup
 Intercom, paging, music on hold
 Call completion, hot-desking

Display and Indicator

132x64-pixel graphical LCD
 LED for call and message waiting indication
 Intuitive user interface with icons and soft keys
 National language selection
 Caller ID with name, number

Physical Features

2xRJ45 10/100M Ethernet ports
 29 keys including 4 soft keys
 1xRJ9 handset port
 1xRJ9 headset port
 Wall mountable
 Optional power adapter: AC 100~240V input and DC 5V/600mA Output
 Power over Ethernet (IEEE 802.3af)
 Power consumption PSU: 0.9 -1.25W
 Dimension (W*D*H*T):
 185mm*188mm*143mm*38mm
 Operating humidity: 10~95%
 Operating temperature: -10~50°C

Management

Configuration: browser/phone/auto-provision/RPS support
 Auto provision via FTP/TFTP/HTTP/HTTPS for mass deployment
 Auto-provision with PnP
 BroadSoft device management
 Zero-sp-touch
 Provisioning server redundancy supported
 Reset to factory, reboot
 Package tracing export, system log

Network and Security

SIP v1 (RFC2543), v2 (RFC3261)
 IPv6
 NAT transverse: STUN mode
 Proxy mode and peer-to-peer SIP link mode
 IP assignment: static/DHCP /PPPoE
 HTTP/HTTPS web server
 Time and date synchronisation using SNTP
 UDP/TCP/DNS-SRV(RFC 3263)
 QoS: 802.1p/Q tagging (VLAN), Layer 3 T oS, DSCP
 SRTP for voice
 Transport Layer Security (T LS)
 HTTPS certificate manager
 AES encryption for configuration file
 Digest authentication using M D5/MD5-sess
 IEEE802.1X

Packaging

Qty/CTN: 10 PCS
 N.W/CTN: 9.6Kg
 G.W/CTN: 10.7Kg
 Giftbox size: 215mm*200mm*121mm
 Carton Meas: 630mm*436mm*210mm


Certifications



WEEE Compliant



ROHS Compliant

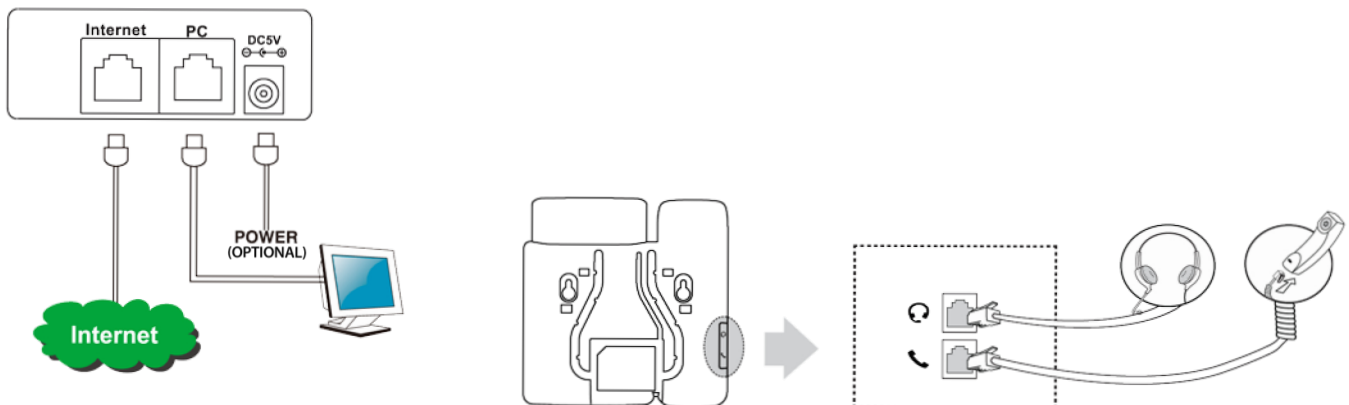

Yealink
 EASY VOIP